
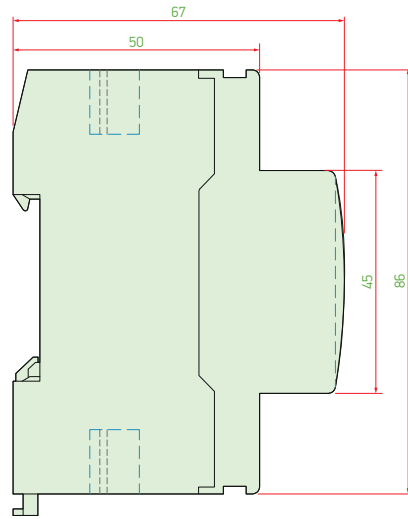


Technical Specification

Model	SAVR-80
Pole number	1P (36mm)
Rated voltage	220/230V AC
Rated current	1-40A, 1-63A, 1-80A
Over-voltage range	230-300V (Default 270V)
Under-voltage range	110-210V (Default 170V)
Tripping time	1-30sec. (Default 5sec.)
Reconnect time	1-500sec. (Default 5sec.)
Power consumption	<2W
Ambient temperature	-20°C ... 70°C
Electro-mechanical life	100,000
Installation	35mm symmetrical DIN rail

Model	SAVR-80T
Number of Phase	3 Phase
Rated voltage	220/230V AC
Over current protection	1-80A
Over-voltage protection range	350-500V
Under-voltage protection range	140-370V
Voltage trip time	0.1-30sec.
Auto reconnect time	1-500sec.
Power consumption	<2W
Ambient temperature	-20°C ... 70°C
Electro-mechanical life	100,000
Installation	35mm symmetrical DIN rail
3Phase asymmetry protection	OFF-20-90V
Phase sequence protection	OFF-0-20T
Current auto-reconnect times	

SAVR-80

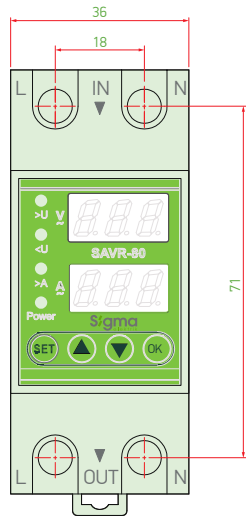

SAVR-80T

