



Technical Specifications

		SFH 160			SFH 250			SFH 400			SFH 630		
Standard		TS EN 60947-3, EN 60947-3											
Nh fuse link size		NH00C- NH00			NH1			NH2			NH3		
Number of poles		3			3			3			3		
Rated voltage	V	400	500	690	400	500	690	400	500	690	400	500	690
Rated operational current	A	160	160	100	250	250	200	400	400	315	630	630	500
Rated insulation voltage	V	800			800			800			800		
Fuse protected rated short circuit current	kA	100	100	80	100	100	80	100	100	80	100	100	80
Utilization category		AC23B, AC22B, AC21B			AC23B, AC22B, AC21B			AC23B, AC22B, AC21B			AC23B, AC22B, AC21B		
Relative Humidity	%	90			90			90			90		
Weight	kg	0,7			1,5			3,3			–		


Dimensions

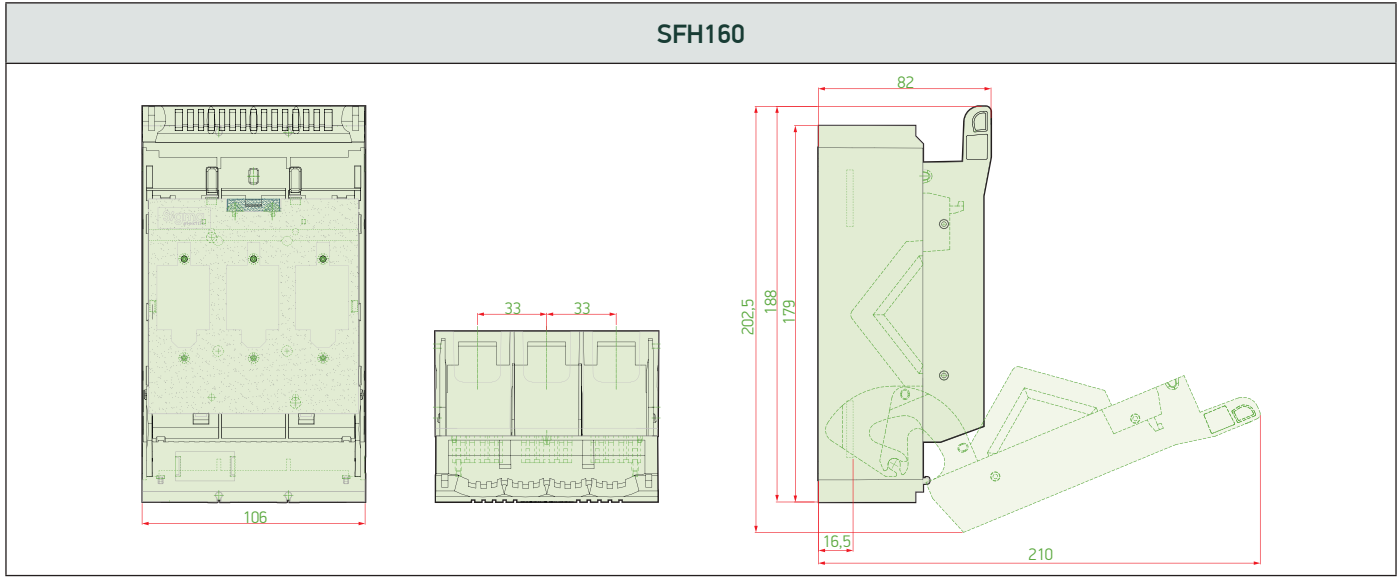

SFH250

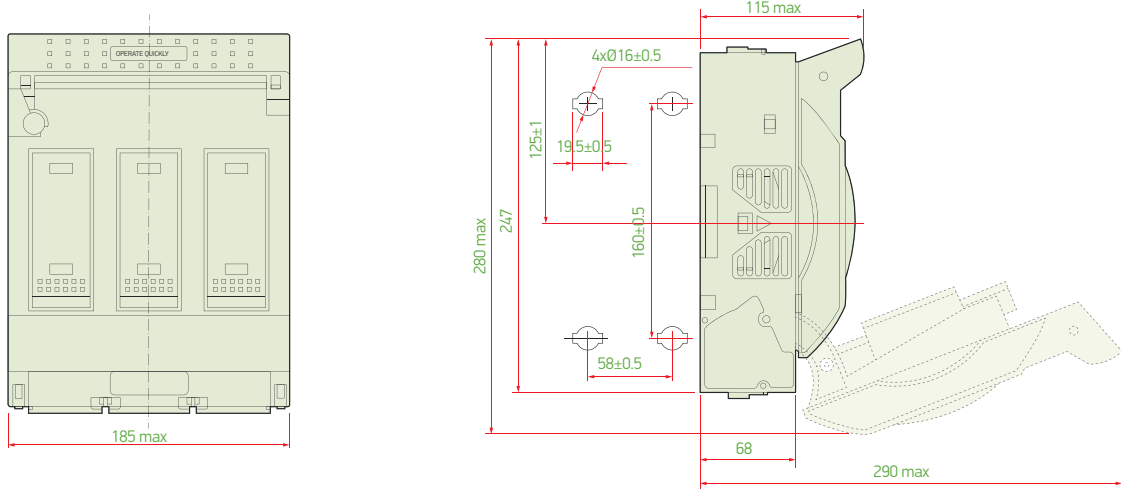

SFH400

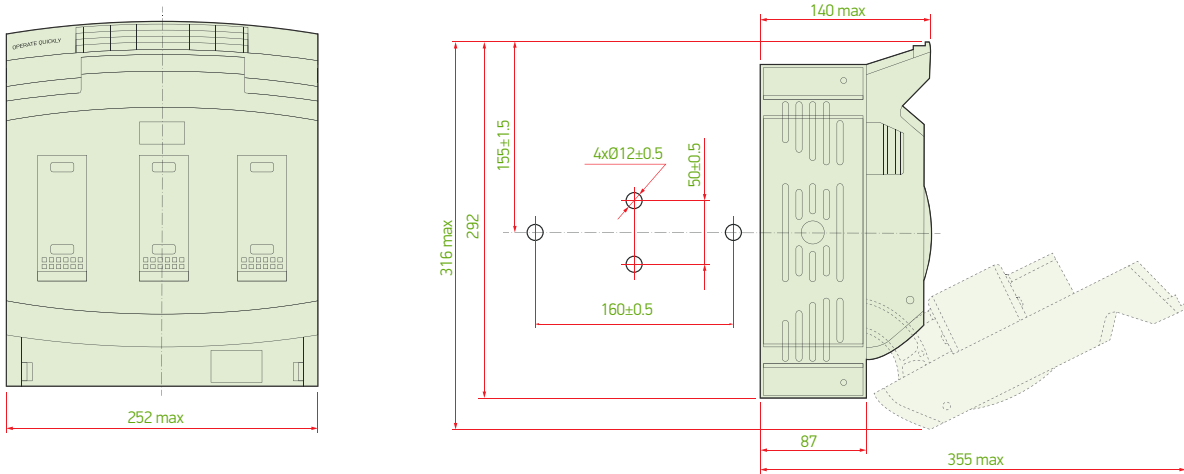

SFH630

