
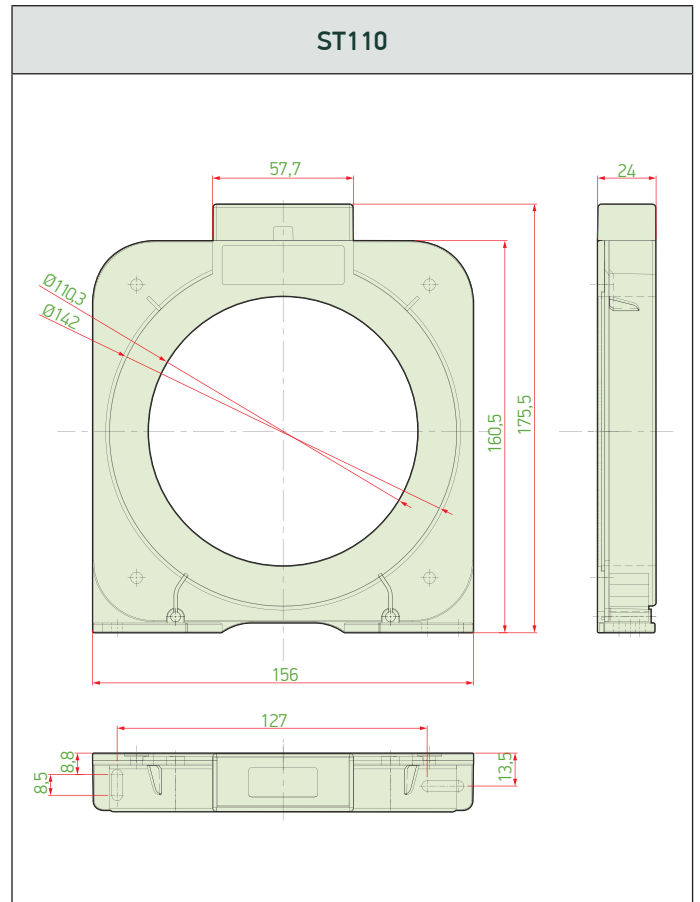



Technical Specifications

Expected Primary Current	30A
Expected Secondary Current	0,156A
Operation Frequency	45-400Hz
Isolation Level	2,5kV 1min
Rated Thermal Resistance Current (Ith)	80kA/0,5sec
Residual Short Circuit Resistance Current (Idn)	100kA/0,5sec
Conversion rate	192/1
Protection level	IP20


Dimensions

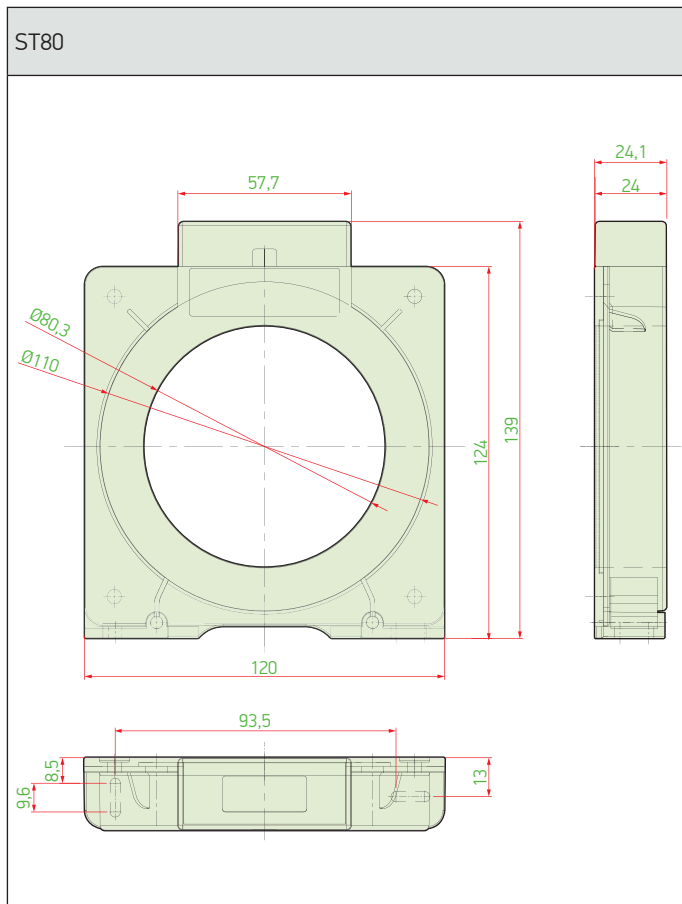


ST160

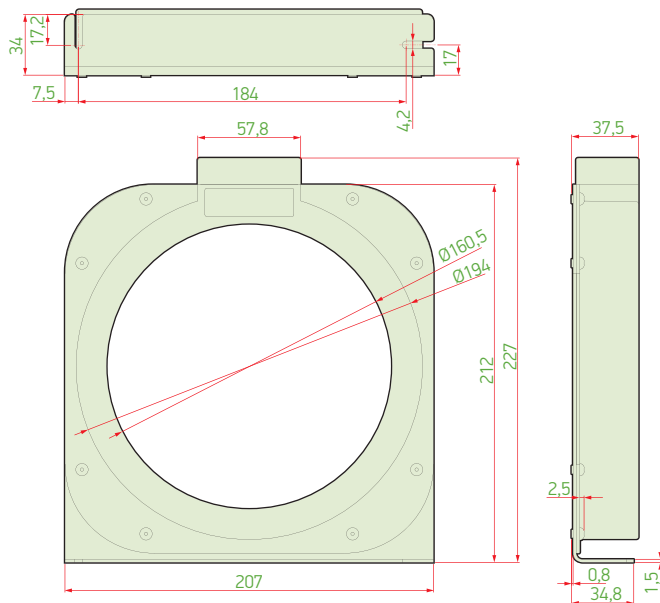


ST210

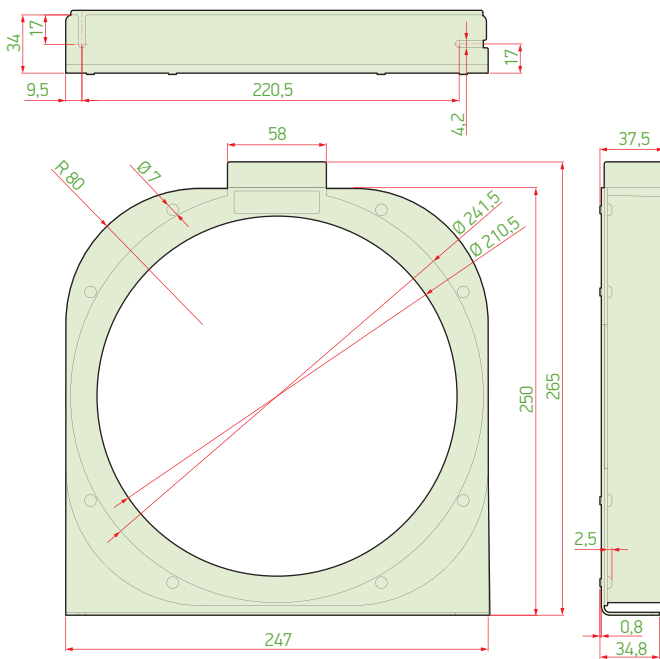

ST300

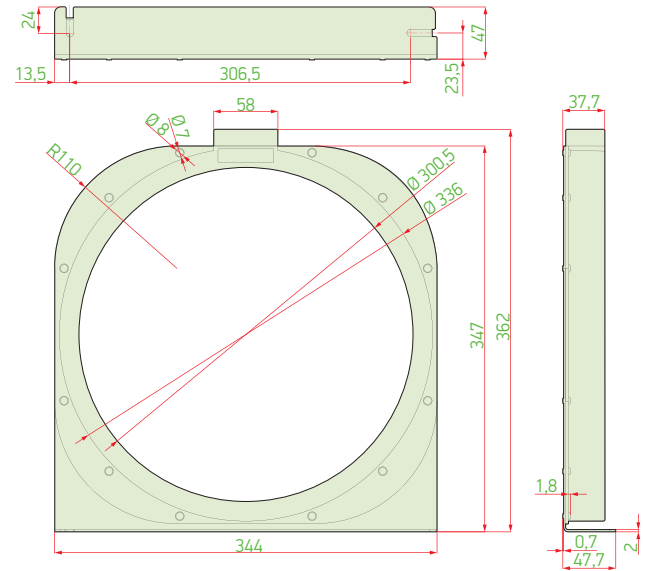


STD280x115 - STD470x160

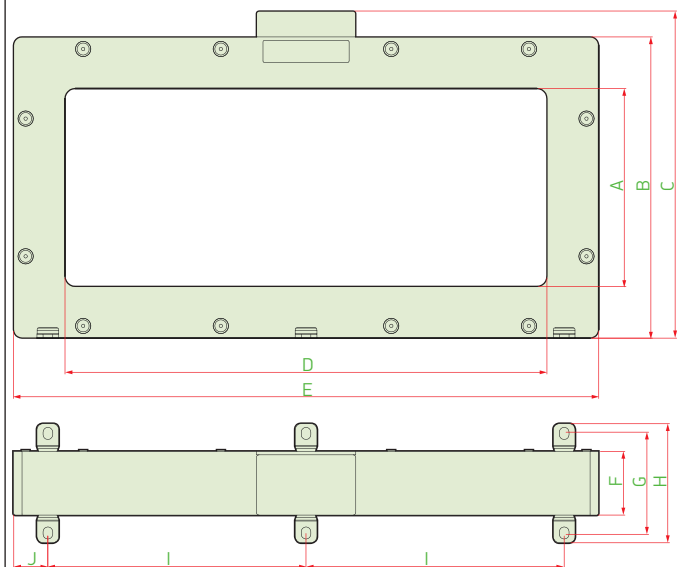

	A	B	C	D	E	F	G	H	I	J
STD280x115	115	175	190	280	340	37	59	69	150	20
STD470x160	161	234	249	471	546	37,5	64	78	180	-

STA-110

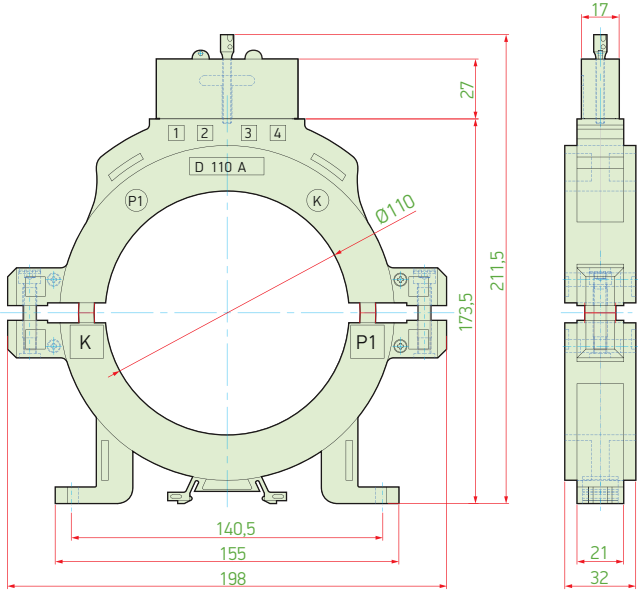

STA-210

