


NH Fuses (Double Indicator) Technical Specifications

Standart		TS EN 60269-1, IEC 60269-1
Boy		NH00C, NH00, NH1, NH2, NH3
Anma Akımı	A	6...630
Anma Gerilimi	V	500
Anma Kısa Devre Kesme Kap.	kA	120
Gövde Malzemesi		Steatit
İşletme Sınıfı		gG-gL

Boyutlar

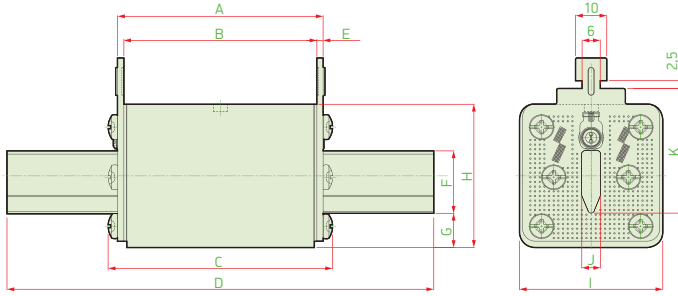


	A	B	C	D	E	F	G	H	I	J	K
NH00C	50	46	54	79	2	15	8	40	21	6	35
NH00	50	46	54	79	2	15	13	43	30	6	35
NH1	66	62	72	137	2	20	11	46	46	6	40
NH2	66	62	72	151	2	25	15	57	57	6	48,5
NH3	66	62	72	151	2	32	17	72	72	6	60

NH Bıçaklı Sigorta Altlığı

Size	Rated Current In (A)	Body	Minimum Order	Box Qty	Order Code
NH00	160	BMC	5	60	SNB00
NH1	250	BMC	5	18	SNB01
NH2	400	BMC	5	14	SNB02
NH3	630	BMC	5	*	SNB03

Boyutlar

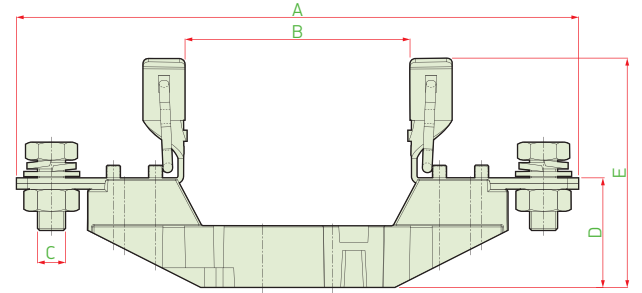

	A	B	C	D	E	F	G	H	I	J	K	L	M
NH3	240	80	M10	2,5	40	98	30	25	210	15	35	59	Ø10,5
NH2	225	80	M10	2,5	39,5	89	30	25	200	12,5	35	59	Ø10,5
NH1	200	80	M10	2	39	82	30	25	175	12,5	35	59	Ø10,5
NH00	120	58	M8	2	23	56	-	25	100	10	20	35	Ø7,5